

# CM-10 LOW & MID FREQUENCY TRANSDUCER

## **KEY FEATURES**

- 250W program power.
- 92,4 dB, 2,83V @ 1m sensitivity.
- Extended controlled displacement: X<sub>max</sub> ± 6,5 mm.
- Treated cloth surround.
- Smooth and flat response and low distortion.
- Suited for bass and midbass applications in small vented cabinets.
- Steel magnet.
- Ferrite magnet.




## TECHNICAL SPECIFICATIONS

Nominal diameter		258 mm	10 in
Rated impedance			8 Ω
Minimum impedance			7,4 Ω
Power capacity*		1	25 W <sub>RMS</sub>
Program power			250 W
Sensitivity	95,3 dB	2.83v @	1m @ $2\pi$
Frequency range		40 -	5.000 Hz
Recom. enclosure vol.	40 / 10	01 1,41	/ 3,53 ft <sup>3</sup>
Voice coil diameter		38,5 mm	1,5 in
Magnetic assembly weight		2,75 kg	6,06 lb
BL factor			12,2 N/A
Moving mass			0,035 kg
Voice coil length			16 mm
Air gap height			7 mm
X <sub>damage</sub> (peak to peak)			24,5 mm

## THIELE-SMALL PARAMETERS\*\*

61 Hz
6,15 Ω
6,38
0,55
0,51
40,7 I
192 μm / N
2,13 kg / s
1,60 %
0,039 m <sup>2</sup>
6,5 mm
195 cm <sup>3</sup>
1,2 mH

## **DIMENSION DRAWINGS**

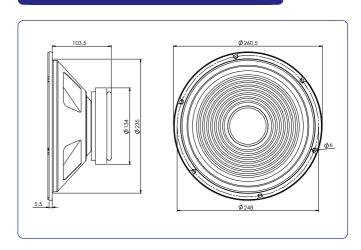

## **MOUNTING INFORMATION**


Overall diameter	260,5 mm	10,26 in
Bolt circle diameter	248 mm	9,76 in
Baffle cutout diameter:		
- Front mount	235 mm	9,25 in
- Rear mount	240 mm	9,45 in
Depth	103,5 mm	4,07 in
Volume displaced by driver	2,5	0,09 ft <sup>3</sup>
Net weight	2,93 kg	6,46 lb
Shipping weight	3,30 kg	7,28 lb

#### Notes


- \* The power capaticty is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.
- \*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).
- \*\*\* The  $X_{max}$  is calculated as  $(L_{VC}$   $H_{ag})/2$  +  $(H_{ag}/3,5)$ , where  $L_{VC}$  is the voice coil length and  $H_{ag}$  is the air gap height.

## **LOW & MID FREQUENCY TRANSDUCER**

## FREE AIR IMPEDANCE CURVE

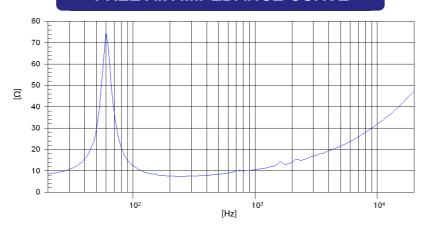

## FREQUENCY RESPONSE AND DISTORTION

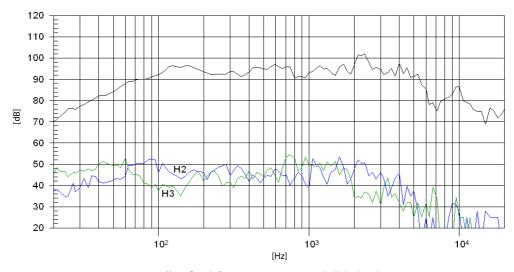

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

## beyma //