

15WR400

LOW FREQUENCY TRANSDUCER

# **KEY FEATURES**

- High power handling: 800 W program power
- 3" copper wire voice coil
- High sensitivity: 99 dB (1W / 1m)
- FEA optimized ceramic magnetic circuit
- Designed with MMSS technology for high control, linearity and low harmonic distortion

- Waterproof cone treatment for both sides of the cone
- Extended controlled displacement:  $X_{max} \pm 6.3 \text{ mm}$
- 30 mm peak-to-peak excursion before damage
- Low harmonic distortion and linear response
- Wide range of applications of low and mid-low frequencies



## **TECHNICAL SPECIFICATIONS**

Nominal diameter	380 r	nm	15 in
Rated impedance			8 Ω
Minimum impedance			6,4 Ω
Power capacity*		4	00 W <sub>AES</sub>
Program power			800 W
Sensitivity	99 dB	1W /	1m @ Z <sub>N</sub>
Frequency range		35 -	4.000 Hz
Recom. enclosure vol.	70 / 150 I	2,45	/ 5,25 ft <sup>3</sup>
Voice coil diameter	76,2	mm	3 in
BI factor			19,2 N/A
Moving mass			0,091 kg
Voice coil length			16 mm
Air gap height			8 mm
X <sub>damage</sub> (peak to peak)			30 mm



$\begin{array}{llllllllllllllllllllllllllllllllllll$
Electrical Quality Factor, Qes0,32Total Quality Factor, Qts0,30Equivalent Air Volume to Cms, Vas224 IMechanical Compliance, Cms205 μm / NMechanical Resistance, Rms2,5 kg / sEfficiency, η₀3,4 %Effective Surface Area, Sd0,088 m²
Total Quality Factor, Qts0,30Equivalent Air Volume to Cms, Vas224 IMechanical Compliance, Cms205 μm / NMechanical Resistance, Rms2,5 kg / sEfficiency, η₀3,4 %Effective Surface Area, Sd0,088 m²
Equivalent Air Volume to Cms, Vas224 ΙMechanical Compliance, Cms205 μm / NMechanical Resistance, Rms2,5 kg / sEfficiency, η₀3,4 %Effective Surface Area, Sd0,088 m²
$\begin{tabular}{lllllllllllllllllllllllllllllllllll$
Mechanical Resistance, Rms2,5 kg / sEfficiency, η₀3,4 %Effective Surface Area, Sd0,088 m²
Efficiency, η₀ 3,4 %   Effective Surface Area, S <sub>d</sub> 0,088 m²
Effective Surface Area, S <sub>d</sub> 0,088 m <sup>2</sup>
a a
Maximum Displacement, X <sub>max</sub> *** 6,3 mm
Displacement Volume, V <sub>d</sub> 555 cm <sup>3</sup>
Voice Coil Inductance, L <sub>e</sub> @ 1 kHz 1 mH

\* The power capaticity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

\*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

\*\*\* The  $X_{max}$  is calculated as  $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$ , where  $L_{vc}$  is the voice coil length and  $H_{ag}$  is the air gap height.


Notes



15WR400

LOW FREQUENCY TRANSDUCER

**WR Series** 

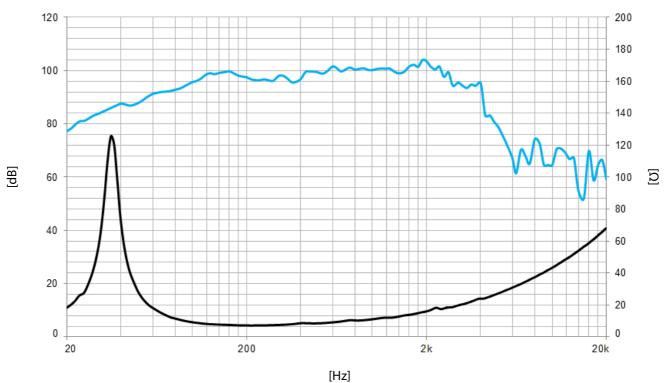

[112]

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION				
Overall diameter	388 mm	15,3 in		
Bolt circle diameter	370 mm	14,6 in		
Baffle cutout diameter:				
- Front mount	349,5 mm	13,8 in		
Depth	162 mm	6,4 in		
Net weight	6,1 kg	13,4 lb		
Shipping weight	7,1 kg	15,6 lb		

## MOUNTING INFORMATION

#### **DIMENSION DRAWING**

