

# THE SOVEREIGN SERIES SOVEREIGN 8-125

BASS / MID RANGE DRIVER



**8" / 203.2 mm**  
CHASSIS DIAMETER

**125 w (A.E.S.)**  
POWER HANDLING

**94 dB**  
SENSITIVITY (1w / 1m)


**60 Hz - 7 kHz**  
FREQUENCY RESPONSE

**1.5" / 38.1 mm**  
Copper Voice Coil

- Medium-power driver ideal for use in pro-sound applications.
- Works well as a mid in small sealed boxes and as a mid/ bass driver in vented boxes.
- Optimised cone pulp offering increased strength, durability and performance.


THE SOVEREIGN SERIES

## FREQUENCY RESPONSE DATA\*

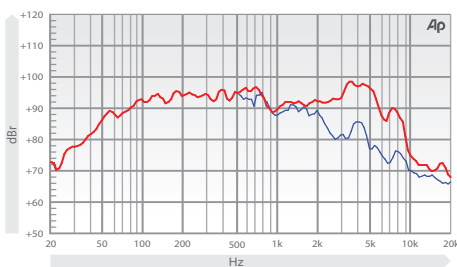


\* Half space response measured in a 975 litre sealed box.

## IMPEDANCE

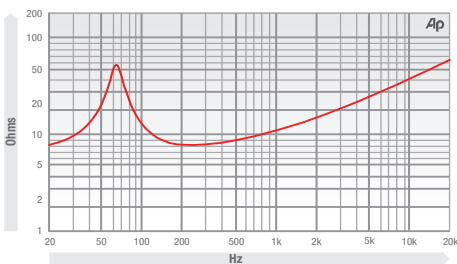

## PREDICTED BASS RESPONSE

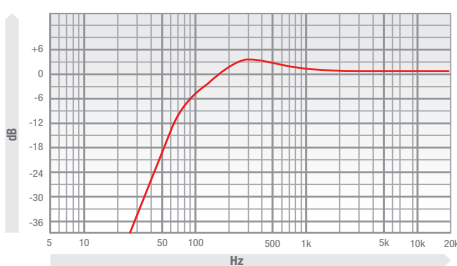

\*\* Normalised bass response in 20 litre tuned to 50 Hz

## ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	8" / 203.2 mm
Impedance	8 Ω
Power Handling	125 w (A.E.S.)
Peak Power (6dB Crest Factor)	500 w (A.E.S.)
Usable Frequency Range -6dB	60 Hz - 7 kHz
Sensitivity (1 w - 1 m)	94 dB
Moving Mass inc. Air Load	19 grams
Minimum Impedance Zmin	7.6 Ω
Effective Piston Diameter	6.496" / mm
Peak Displacement Volume of Cone Vd	0.073 litres
Magnetic Gap Depth	0.23" / 5.84 mm
Flux Density	1.1 Tesla
Coil Winding Height	0.51" / 12.95 mm
Voice Coil Diameter	1.5" / 38.1 mm

## MOUNTING / SHIPPING INFORMATION


Overall Diameter	8.18" / 207.77 mm
Width Across Flats	N/A
Flange Height	0.27" / 6.9 mm
Baffle Hole Diameter F/M	7.24" / 183.89 mm
Baffle Hole Diameter R/M	7.24" / 183.89 mm
Gasket Supplied	Front & Rear
Fixing Holes	8x 5.5 mm on 7.79" / 197.8 mm PCD
Depth	3.7" / 93.98 mm
Weight	3.85 lb / 1.75 kg
Recommended Enclosure Volume	0.35 - 0.88 cu ft / 10 - 25 litres
Shipping Weight	5.51 lb / 2.5 kg
Packing Carton Dimensions	130 x 240 x 240 mm

## THIELE SMALL PARAMETERS

FS Hz	65 Hz
RE Ohms	6.7 Ω
Qms	6.6
Qes	0.75
Qts	0.68
Vas Ltr	19.5 litres
Vd litres	0.074 litres
CMS (mm/N)	0.3 mm/N
BL T/m	8.5 T/m
Mms (grams)	19 grams
Xmax (mm)	3.45 mm
Sd (cm²)	213 cm²
Efficiency %	0.70%
Le (1k Hz)	1.276 mH

## MATERIALS OF CONSTRUCTION

Former Material	1.1 Tesla
Voice Coil	Copper
Magnet Material	Ferrite
Chassis	Pressed Steel
Cone	Paper
Surround / Edge Termination	Polyvinyl Damped Dbl. Half Roll Linen
Dust Dome	Paper
Connectors	Solder Tag
Polarity	Positive voltage at red terminal causes forward motion of cone

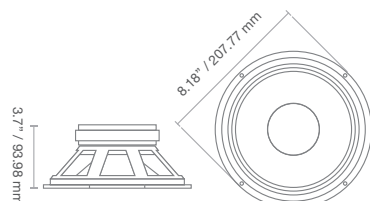

- Please enquire about alternative impedances.
- A.E.S. power handling test. Pink noise bandpass filtered at 12 dB per octave with cutoff frequencies of 60 Hz and 600 Hz. Driver mounted in free air, test signal applied at rated power for two hours.
- Please note that the frequency response measurements are supplied for comparison only and are not a measure of the low frequency performance which may be achieved in a fully optimised system.
- Technical Schematic provided for illustrative purposes only and is not indicative of the actual product.

SOVEREIGN 8-125

FANE