

MI4D HDSP+ETH



2-Channel Power Amplifier with DSP and Ethernet for Portable and Permanently Installed Applications



- ✓ Touring
- ✓ Installation

2CH



DSP
on board



- ▶ Small-scale systems, portable and installed
- ▶ Stage monitors
- ▶ Hotels, restaurant and bars
- ▶ Amusement parks, themed entertainment
- ▶ Houses of worship, auditoriums
- ▶ Educational facilities
- ▶ Live and dance clubs
- ▶ Mobile DJ's

Equally versatile in both portable and installed system configurations, occupying only one single rack space and weighing just over 7 kg / 16 lb, the **MI4D HDSP+ETH** is a highly flexible, great sounding solution for compact sound systems.

The **MI4D HDSP+ETH** provides unparalleled levels of control and monitoring through the Armonía Pro Audio Suite™ software, with the same user interface and on the same network as all Powersoft amplifiers. Locally, the **MI4D HDSP+ETH** lets the user access up to four presets per pushbutton on the rear panel. Furthermore, the high-performance DSP is tucked away inside and safe against accidental or intentional tampering.

Benefiting from core technologies of Powersoft's flagship K Series, the **M Series** is highly efficient, leading to low power consumption, and consequently to less money spent on electricity, all in an eco-friendly way.

The **MI4D HDSP+ETH** comes with 4 years warranty and, like all Powersoft products, is entirely designed and made in Italy.

2-channel mode		mono-bridged mode
4 Ω / Ch	8 Ω / Ch	8 Ω / Ch pair
700 W	360 W	1,400 W

EIAJ Test Standard, 1 kHz, 1% THD


- ✓ **Legendary Powersoft efficiency:**
 - ▶ Compact and space saving: 1 RU at 358 mm / 14.1" standard depth
 - ▶ Green Audio Power®: minimal "carbon footprint" and operational cost of electricity
 - ▶ Great sound, little weight: only 7.3 kg / 16 lb
- ✓ **Unique Powersoft technology for efficient, reliable performance:**
 - ▶ Switch mode power supply, internally switchable 230/115 V nominal
 - ▶ Fixed frequency switch mode amplifier output stages
 - ▶ Patented amplifier output filters with ripple cancellation network
- ✓ **Direct PC/network connection:**
 - ▶ Ethernet interface for system setup, monitoring and control
 - ▶ Fully manageable via Armonía Pro Audio Suite™ software
 - ▶ On the same network as all the other Powersoft amplifiers
- ✓ **Top-grade DSP on board:**
 - ▶ Dual 24-bit A/D & D/A with high dynamic range; crossover filters for bi-amped and tri-amped systems; separate input and output EQ's with numerous filters of various types up to 48 dB/oct; peak, RMS, and frequency dependent RMS limiters; delay for driver time alignment
 - ▶ Comprehensive system/load monitoring
- ✓ Four presets on board with selection button
- ✓ Optimized for 4 Ω loads, thus ideally matching real-world scenarios in targeted applications
- ✓ Fully protected circuit design:
 - ▶ AC protection: shuts down power supply when AC mains voltage is outside operating range
 - ▶ Clip limiter: prevents severely clipped waveforms from reaching loudspeakers, while still maintaining full peak power output
 - ▶ DC protection: protects against infrasonic signal at the outputs
 - ▶ VHF protections: protects the loudspeakers against destructive non-audible, non-musical high frequency signals
 - ▶ Short circuit protection: protects the amplifier from short circuit or similar events on the outputs; with automatic protection reset
 - ▶ Thermal protection: mutes outputs once output devices reach 75 °C / 167 °F; automatic unmute once temperature is down to 65 °C / 149 °F
- ✓ Temperature controlled continuous variable speed fan, front to rear airflow
- ✓ Recessed stepped level attenuators
- ✓ Full four years warranty
- ✓ Also available as MI4D without DSP and Ethernet port



MI4D HDSP+ETH



2-Channel Power Amplifier with DSP and Ethernet for Touring and Install Applications

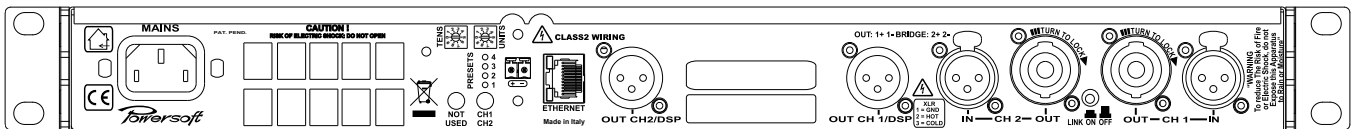

Specifications

General				
Number of channels		2		
Output power		2-channel mode		mono-bridged mode
EIAJ Test Standard, 1 kHz, 1% THD		4 Ω / Ch	8 Ω / Ch	8 Ω / Ch pair
		700 W	360 W	1,400 W
Max output voltage / current		85 V _{peak} / 65 A _{peak}		
AC Mains Power				
Power supply		Universal, regulated switch mode		
Operating voltage / Inrush current		115 V / 230 V (factory selection) ± 15%, 50 Hz - 60 Hz / < 26 A _{RMS}		
Consumption / current draw		@ 230 V		@ 115 V
Idle		39 W	0.3 A	39 W
1/8 of max output power @ 4 Ω		283 W	1.9 A	283 W
1/4 of max output power @ 4 Ω		538 W	3.5 A	538 W
Thermal				
Environmental operating temperature		0° - 45° C / 32° - 113° F		
Thermal dissipation		Fan, continuously variable speed, temperature controlled, front to rear airflow		
Idle		133 BTU/h		33 kcal/h
1/8 of max output power @ 4 Ω		368 BTU/h		93 kcal/h
1/4 of max output power @ 4 Ω		641 BTU/h		162 kcal/h
Audio				
Gain		32 dB, 30 dB, 28 dB, 26 dB, 24 dB, 22 dB, 20 dB, 18 dB, 14 dB, 4 dB, -∞, user selectable		
Frequency response		10 Hz - 30 kHz (1 W @ 8 Ω, ± 3 dB)		
S/N ratio (amplifier section)		109 dBA (20 Hz - 20 kHz, A weighted)		
Crosstalk separation		>70 dB @ 1 kHz		
Input sensitivity @ 8 Ω		1.4 V / 5.14 dBu		
Max input level		6 V / 17.7 dBu		
Input impedance		10 k Ω		
THD+N / SMPTE IMD		≤ 0.05% @ 1/2 of full power		
DIM100 IMD		typ. < 0.005% (< 0.02% @ > 0.1 W)		
Slew rate		40 V/μs @ 8 Ω, input filter bypassed		
Damping factor @ 8 Ω		> 5000 @ 100 Hz		
DSP				
A/D converter		CS5381, 2 channels, 24 bit / 48 kHz, 120 dB SNR		
D/A converter		CS4398, 2 channels, 24 bit / 48 kHz, 120 dB SNR		
Frequency response @ -3 dB		7 Hz - 22 kHz		
THD		< 0.01% (20 Hz - 20 kHz)		
Presets		Bank of 4 presets, management and upload via Armonia Pro Audio Suite™		
Delay for time alignment		10 ms per output		
Crossover filters		Butterworth, Linkwitz-Riley, Bessel, 6 dB/oct to 48 dB/oct		
Output equalizer		up to 12 biquad fully parametric per channel: peaking, hi/lo shelving, hi/lo pass, band pass, band stop, all pass.		
Input equalizer		up to 5 biquad filters (PEQ, shelving, band pass, band stop, all pass)		
Limiters		Peak limiter, RMS limiter, frequency dependent RMS limiter		
Damping control		< 120 Hz, range ± 2 Ω		
System Delay		up to 170 ms for 2 IN/2 OUT or 340 ms for 1 IN/2 OUT		
Front Panel				
Indicators		4 LEDs per channel: 3 x green, 1 x red 2 status LEDs: 1 x green, 1 x yellow		
Controls		1 stepped level attenuator pot per channel; mains switch		
Maintenance		Dust filter foam behind front panel		
Rear Panel				
Audio signal input connectors		2 x balanced Neutrik® XLR female		
Loudspeaker output connectors		2 x Neutrik® Speakon NL4MD, 2 x Neutrik® XLR male hard-wired to the corresponding input		
Network data port Ethernet		1 x RJ45 with activity LED with 2 rotary address switches		
DSP preset selection		1 x Pushbutton (stepping through bank of 4 presets); 1 x 4 LED preset indicators		
Aux voltage		1 x 2-pin Phoenix type MC 1.5/2-ST-3.81		
AC mains		IEC C13 16 A connector; AC mains cord with 3-pin plug 15 A for US, IEC Schuko 16 A for every other nation		
Controls		1 x link switch, linking analog inputs 1 & 2		
Construction				
Dimensions		W 483 mm / 19"; H 44.5 mm / 1.75"; D 358 mm / 14.1"		
Chassis		1 mm (0.04") steel chassis and steel removable dust cover, 3 mm (0.12") steel front panel, screw hole protection, steel side reinforcement & rear support		
Weight		7.3 kg / 16 lb		

Data is subject to change without notice.
© 2012 Powersoft • All rights reserved.

