


CT198N




Silk dome
Neodymium magnet
Mounting holder provided
Ferrofluid cooled

GENERAL SPECIFICATIONS


Program power	100 W
Rated impedance	4 Ω
Nominal diameter	0,78"/20mm
Sensitivity (1W/1m)	90 dB
Voice coil diameter	19 mm
Frequency range	5 - 20 kHz

TECHNICAL SPECIFICATIONS

Power handling capacity	50 W
Gap height	1,50 mm
N. of mounting holes	-
Front mount baffle cutout ø	33 mm
Re	3,20 Ω
Fs	1,45 kHz
Qms	1,93
Qes	5,24
Qts	1,41
Mms	0,15 g
Cms	-
D	23 mm
Vas	-
B · l	1,00 Wb/m
Xmax	-
η _o	1,00 %
Le	0,04 mH
Net weight	0,06 Kg
Recomm. crossover freq.	6 kHz
Volume / Tuning frequency	-

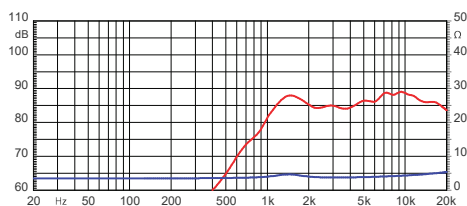

CT250



Silk dome
Neodymium magnet
Ferrofluid cooled
Revolving

GENERAL SPECIFICATIONS

Program power	150 W
Rated impedance	4 Ω
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	91 dB
Voice coil diameter	26 mm
Frequency range	2,5 - 20 kHz

TECHNICAL SPECIFICATIONS

Power handling capacity	75 W
Gap height	2 mm
N. of mounting holes	-
Front mount baffle cutout ø	-
Re	3,30 Ω
Fs	1,40 Hz
Qms	0,97
Qes	1,23
Qts	0,54
Mms	0,30 g
Cms	-
D	32 mm
Vas	-
B · l	1,70 Wb/m
Xmax	-
η _o	-
Le	0,08 mH
Net weight	0,11 Kg
Recomm. crossover freq.	2,5 kHz
Volume / Tuning frequency	-

