


# HT050




Treated cellulose fiber membrane and surround

## GENERAL SPECIFICATIONS


Program power	90 W
Rated impedance	8 Ω
Nominal diameter	2"- 50 mm
Sensitivity (1W/1m)	91 dB
Voice coil diameter	14 mm
Frequency range	5 kHz

## TECHNICAL SPECIFICATIONS

Power handling capacity	35 W
Gap height	2 mm
N. of mounting holes	4 ø 4,5 / ø 161
Front mount baffle cutout ø	50 mm
Re	5,40 Ω
Fs	1,50 kHz
Qms	-
Qes	-
Qts	-
Mms	0,35 g
Cms	-
D	-
Vas	-
B * l	2,10 Wb/m
Xmax	-
η <sub>0</sub>	-
Le	0,08 mH
Net weight	0,14 Kg
Recommended loading	-
Volume / Tuning frequency	-

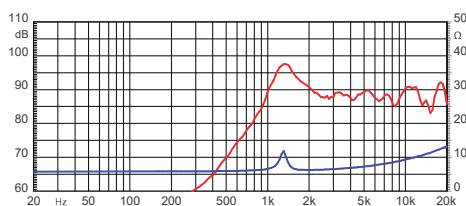

# HT080



Treated cellulose fiber membrane and surround

## GENERAL SPECIFICATIONS

Program power	90 W
Rated impedance	8 Ω
Nominal diameter	3"- 80 mm
Sensitivity (1W/1m)	92 dB
Voice coil diameter	14 mm
Frequency range	5 kHz

## TECHNICAL SPECIFICATIONS

Power handling capacity	35 W
Gap height	2 mm
N. of mounting holes	4 ø 5 / ø 100
Front mount baffle cutout ø	81 mm
Re	5,30 Ω
Fs	1,30 Hz
Qms	-
Qes	-
Qts	-
Mms	-
Cms	-
D	75 mm
Vas	-
B * l	-
Xmax	-
η <sub>0</sub>	-
Le	-
Net weight	0,26 Kg
Recommended loading	-
Volume / Tuning frequency	-

