


HT259




Silk dome

GENERAL SPECIFICATIONS


Program power	120 W
Rated impedance	8 Ω
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	89 dB
Voice coil diameter	26 mm
Frequency range	2,5 - 20 kHz

TECHNICAL SPECIFICATIONS

Power handling capacity	60 W
Gap height	2,50 mm
N. of mounting holes	4 ø 5 / ø 88
Front mount baffle cutout ø	65 mm
Re	6,30 Ω
Fs	1 kHz
Qms	5,00
Qes	3,00
Qts	1,87
Mms	0,30 g
Cms	0,09 mm/N
D	32 mm
Vas	-
B * l	2,30 Wb/m
Xmax	-
η _o	-
Le	0,07 mH
Net weight	0,28 Kg
Recomm. crossover freq.	3 kHz
Volume / Tuning frequency	-

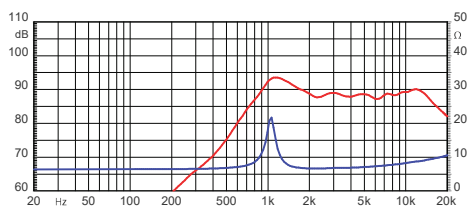

HT261



Fabric dome
Diecast aluminum flange

GENERAL SPECIFICATIONS

Program power	200 W
Rated impedance	8 Ω
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	90 dB
Voice coil diameter	26 mm
Frequency range	2,5 - 20 kHz

TECHNICAL SPECIFICATIONS

Power handling capacity	100 W
Gap height	3 mm
N. of mounting holes	4 ø 5 / ø 96
Front mount baffle cutout ø	75 mm
Re	6,20 Ω
Fs	970 Hz
Qms	5,56
Qes	1,50
Qts	1,18
Mms	-
Cms	-
D	28 mm
Vas	-
B * l	-
Xmax	-
η _o	-
Le	0,07 mH
Net weight	0,50 Kg
Recomm. crossover freq.	3 kHz
Volume / Tuning frequency	-

