


FTR15-3070E



- Glass loaded paper cone with weather-resistant impregnation
- Airflow vented magnet assembly for dynamic heat dispersion

8 Frequency Response

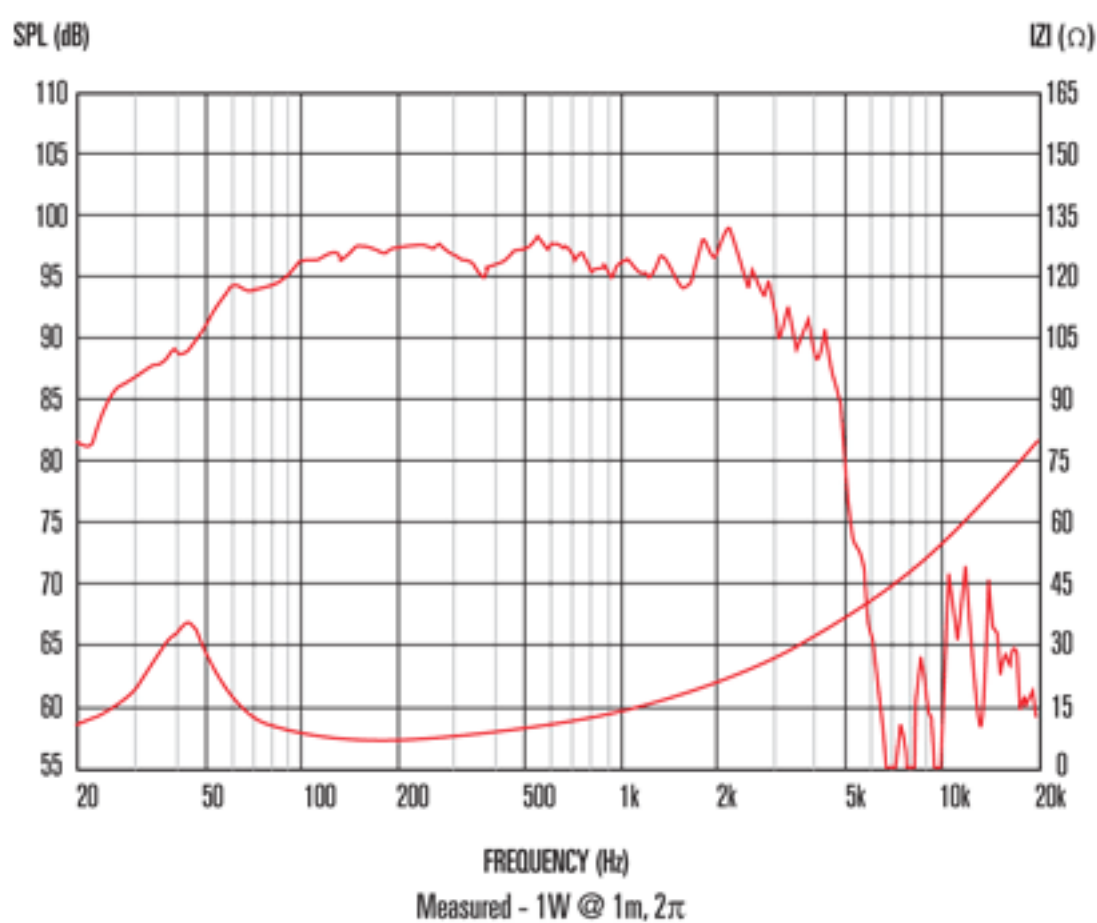

1. Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2. Continuous Power Rating is defined as 3dB greater than the AES rating.
3. Tested as per the EIA-426-A standard.
4. Measured on axis at 1W, 1m in 2 $\bar{1}$ anechoic environment.
5. Xmax derived from: (voice coil winding width-gap depth)/2.
6. Small signal parameters measured after unit subjected to pre-conditioning signal.

General Specifications

Nominal diameter	381mm/15in
Power rating ¹	400Wrms
Continuous power rating ²	800W
EIA power rating ³	500W
Nominal impedance	8
Sensitivity ⁴	97dB
Frequency range	40-4,000Hz
Voice coil diameter	75mm/3in
Chassis type	Cast aluminium
Magnet type	Ferrite
Magnet weight	2.3kg/81oz
Coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded paper with weather-resistant impregnation
Surround material	Cloth-sealed
Suspension	Single
Xmax ⁵	5.5mm/0.22in
Gap depth	9mm/0.35in
Voice coil winding width	20mm/0.79in

Small Signal Parameters ⁶

D	0.33m/8.38in
Fs	45.9Hz
Mms	85.53g/3.02oz
Qms	3.409
Qes	0.426
Mmd	74.54g/2.63oz
Qts	0.379
Re	5.52
Vas	145.75lt/5.15ft ³
Bl	17.87Tm
Cms	0.14mm/N
Rms	7.23kg/s
Le (at 1kHz)	1.21mH

Mounting Information

Overall diameter	385mm/15.16in
Overall depth	161mm/6.34in
Cut-out diameter	351mm/13.82in
Mounting slot dimensions	10mm x 7mm/0.39in x 0.27in
Number of mounting slots	8
Mounting PCD range	365-375mm/14.37-14.76in
Unit weight	6.4kg/14.1lb

Packed Dimensions & Weight

Single pack size W x D x H	435mm x 435mm x 200mm /17.1in x 17.1in x 7.9in
Single pack weight	7.1kg/17.0lb
Multi pack size W x D x H	1210mmx1050mmx980mm /47.6in x 41.3in x 35.4in
Multi pack weight	260kg/570lb