



QUBE

QA 118SA


ACTIVE SUBWOOFER

APPLICATIONS

- Permanent installations in Theatres, Concert Halls, Clubs, Places of Worship, Conference Rooms, Indoor Sports, Arenas & Stadiums
- Sound reinforcement for live events: Touring, Bands, Orchestras, Conference both indoors and out, where uniform sound pressure level is required over the entire listening area

FEATURES

- 0,70" Baltic birch plywood enclosure with textured scratch resistant paint finish
- 18" B&C woofer with 4" voice coil
- 1200W RMS class "D" power amplifier
- SPL capability: 137dB peak
- Integrated handles and 0,78" female top mount flange for satellite pole mount
- Completely Manufactured in Italy

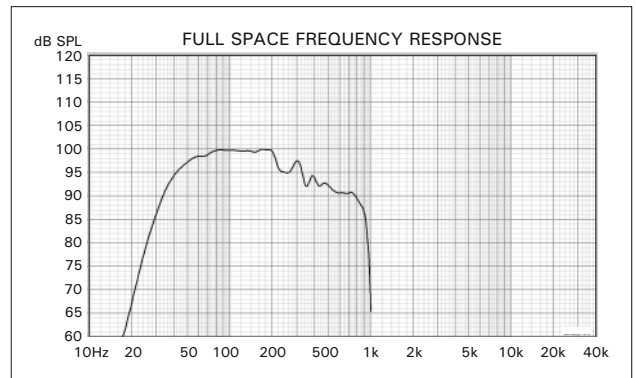

PRODUCT DESCRIPTION

The FBT QUBE QA118SA is a powered compact bass reflex cabinet subwoofer. It incorporates a 18" B&C woofer with a 4" voice coil handling 1200W RMS class D amplifier with a switch mode power supply. With an extended frequency response from 33Hz to 120Hz provides 137dB SPL. The FBT QUBE QA118SA control panel features stereo left & right channel XLR inputs and stereo left & right XLR link outputs, volume control, preset, delay, 0°-180° phase reversal switch, three led indicators status. The DSP controller provides 6 different equalization presets and 6 different delay settings. The cabinet is constructed with 0,70" Baltic birch plywood finished with scratch and scuff resistant black paint. Ergonomically placed integrated handles provide for easy handling/lifting/transporting. The FBT QUBE QA118SA features a 0,78" female top mount flange for the optional satellite pole mount.

ELECTRICAL PERFORMANCE

| | |
|-----------------------------|-----------------|
| System Type: | 1-way |
| Built-in Amplifier max. RMS | 1200W |
| Frequency Response @ -6dB | 33Hz - 120Hz |
| Max. SPL cont. / peak* | 133 / 137dB |
| Dispersion | omnidirectional |
| AC Power Requirements | 800VA |

PHYSICAL

| | |
|------------------------------|----------------------------|
| Low Frequency Woofer | 18" - coil 4" |
| Net Dimensions (WxHxD) | 21,20" x 24,40 x 26,37" |
| Net Weight | 112,43lbs |
| Transport Dimensions (WxHxD) | 27,55" x 30,31 x 31,49" |
| Transport Weight | 134,48lbs |
| Power Cord | 16,40ft |
| Enclosure Material | 0,70" Baltic birch plywood |

* CONT. SPL: free space, based on recommended amp rating and LF transducer average sensitivity data, 125mS time average
PEAK SPL: free space, based on short term applicable power rating and system peak sensitivity, 10mS time average




QUBE




QA 118SA

ACTIVE SUBWOOFER

DIMENSIONAL DRAWING

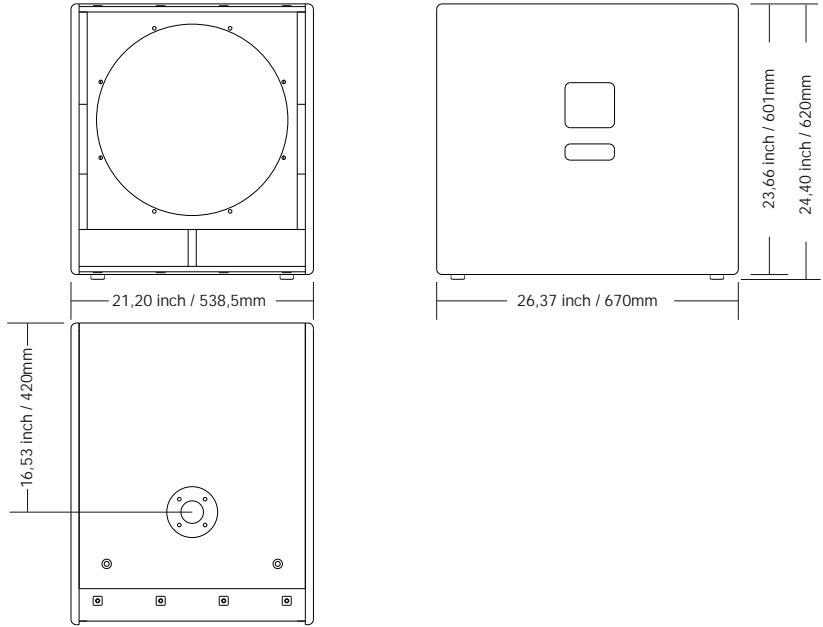

ACCESSORIES

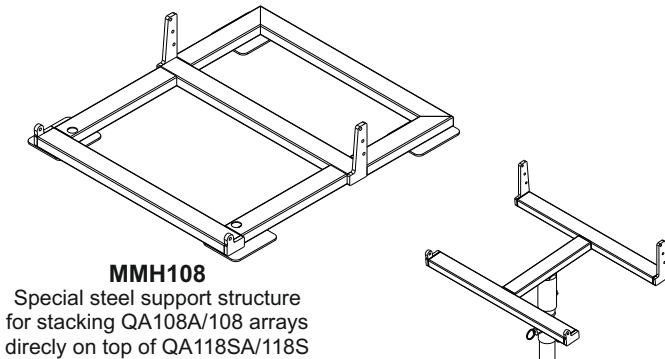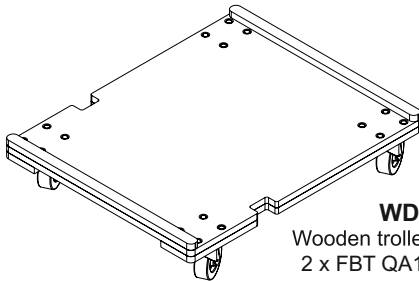

CONNECTION PANEL

