



18PZB100




4Ω**LF Drivers - 18.0 Inches**

- 1400 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 40 - 2000 Hz response
- 96.5 dB sensitivity
- Double silicone spider with optimized compliance



18PZB100

LF Drivers- 18.0 Inches

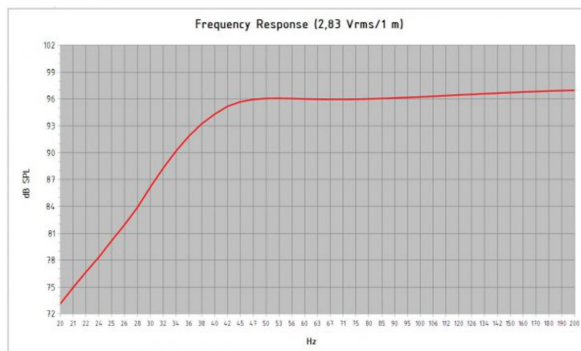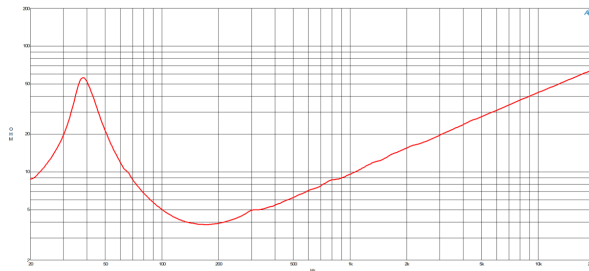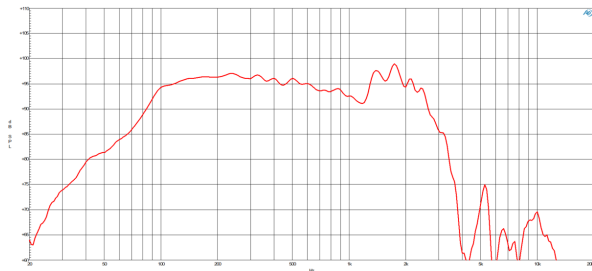

Model: **18 PZB 100**
 Enclosure Type: **Base Reflex**
 Internal Net Volume (Liters): **160**
 Tuning Frequency (Hz): **39**
 Frequency (-3 dB) (Hz): **40.3**
 Port Area (cm²): **339.6**
 Port Length (cm): **23.8**
 Excursion Limited Maximum SPL at 1 meter (dB): **120.6** equal to **256.7** Watts (Bass Band Power Rating)
 Thermal Limited Maximum SPL at 1 meter (dB): **125.0** equal to **700.0** Watts (Mid Band Power Rating)

SPECIFICATIONS

Nominal Diameter	460 mm (18.0 in)
Nominal Impedance	4 Ω
Minimum Impedance	4.2 Ω
Nominal Power Handling ¹	700 W
Continuous Power Handling ²	1400 W
Sensitivity ³	96.5 dB
Frequency Range	40 - 2000 Hz
Voice Coil Diameter	100 mm (4.0 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	21.0 mm (0.83 in)
Magnetic Gap Depth	11.0 mm (0.43 in)
Flux Density	1.15 T

DESIGN

Surround Shape	Double Roll
Cone Shape	Exponential
Magnet Material	Ferrite
Spider	Double Silicone
Pole Design	Straight Pole
Woofer Cone Treatment	TWP Waterproof Both Sides
Recommended Enclosure	160.0 dm ³ (5.65 ft ³)
Recommended Tuning	39 Hz

PARAMETERS⁴

Resonance Frequency	38 Hz
Re	4.0 Ω
Qes	0.29
Qms	6.1
Qts	0.28
Vas	164.0 dm ³ (5.79 ft ³)
Sd	1134.0 cm ² (175.77 in ²)
η _o	2.95 %
X _{max}	± 8.0 mm
X _{var}	± 8.0 mm
M _{ms}	190.0 g
Bl	25.0 Txm
Le	1.25 mH
EBP	131 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	460 mm (18.11 in)
Bolt Circle Diameter	440 mm (17.32 in)
Baffle Cutout Diameter	422.0 mm (16.61 in)
Depth	202 mm (7.95 in)
Flange and Gasket Thickness	16 mm (0.63 in)
Air Volume Occupied by Horn	9.5 dm ³ (0.34 ft ³)
Net Weight	12.1 kg (26.6 lb)
Shipping Units	1
Shipping Weight	13.7 kg (30.2 lb)
Shipping Box	500x495x275 mm (19.69x19.49x10.83 in)

SERVICE KIT

Recone kit	RCK18PZB1004
------------	--------------

1. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2 V for 4 ohms Nominal Impedance.
4. Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.